

WAIKEMATA HARBOUR

LEGAL BOUNDARY

ALLOT 655 PARISH OF TAKAPUNA


TOE OF BANK

WALL

TABLE

330

- NOTES
1. Refer also to the Plan Equipment Plan (L8102), Demolition Plan (L8201), Drainage & Levels plan (L8301) & Earthwork Plan (L8501) for further information.
 2. The contractor is to keep a copy of the Resource Consent on site and comply with the conditions of consent at all times.
 3. Silt control measures are to be established and maintained for the duration of the contract, in accordance with the Erosion and Sediment Control Guide for Land Disturbing Activities in the Auckland Region document.
 4. All demised materials to be sent for recycling, where possible. Excavated concrete used on site may be reused on site. All surplus topsoil shall be stockpiled on site for later reuse. Any excavated fill/scale material removed from site shall be disposed of to an authorised facility.
 5. All adjacent buildings, trees, furniture and hardstand elements not scheduled for removal are to be protected for the duration of the contract works, as per the conditions of consent. The contractor will be required to make good any damage to these elements at their cost.
 6. The site is to be fenced off from public access for the duration of the works, and signage advising the public of the duration of the works and alternative access routes shall be displayed clearly on the site. This signage is to be co-ordinated with Council's Communications team, and will be arranged by the Project Manager.

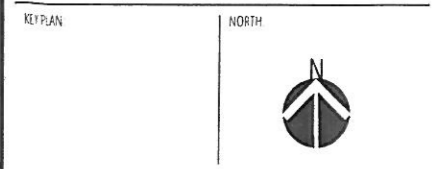

PROJECT:				

PROJECT NAME			
Frank's Boat Relocation			
ISSUED FOR			
CONSENT			
SHEET TITLE			
General Arrangement Plan			
1358	1:100	L8102	A